

ARUNDI DECORATIVE WOOD WALL PANELS



PRODUCT SPECIFICATIONS

SLAT DIMENSIONS	Overall standard thickness is 1 3/8" Panels include a 3/4" thick nominal veneered backer (11/16") Standard individual slat size is 1" face, 3/4" visible depth Ribbon thickness is 1/2"
PANEL WIDTH	Panels supplied in 4' widths only
PANEL HEIGHT	8' standard Up to 10' available (price increase applies, may be subject to longer lead time)
VENEER LAYUP	Plain Sawn, Book Matched
MINIMUM	96sf
FINISH	Unfinished or Prefinished - see next page
INSTALLATION	Typically Installed with Z-Clips - see next page

NOTE: Pricing of all solid wood and veneer products experience fluctuations. Please reach out for current pricing for your specific project



ARUNDI DECORATIVE WOOD WALL PANELS

PRODUCT DATA

Description: Three-dimensional wall and ceiling panels with solid wood slats and veneer backer on MDF.

Species Options: Select White Oak, Select Walnut

Source Options: Domestic Timber (Midwest), FSC® Certified Available on Request (FSC-C199866)

Dimensions: 4'x8' panels standard

Weight: 2.75-3lbs per SF

Core: 11/16" MDF, NAF, TSCA Title VI Compliant, Class A Fire Rated and/or FSC Certified Core available on request (FSC-C199866)

Finish Options: Matte Clear, Premium Oil

Additional Options: Trim and corner pieces available for an additional charge. Unfinished slatted wall panels are available upon request.

Site Conditions: For most installations, we recommend a climatic temperature between 55 to 75 degrees Fahrenheit and 30% to 50% humidity level. Environments that do not meet these criteria will cause wood to experience shrinking and swelling issues that damage the product. We cannot guarantee our product's performance in such environments.

Installation: Installation materials are not included and must be purchased separately. For wall installation, we recommend using MF375 Monarch Z-Clips. For ceiling installations, please contact us for specific fasteners

Grain and Allowances: Natural color and grain variation occur across panels. White Oak and Walnut panels may include sapwood up to 10% of total panel. Small, sound pin knots may occur in solid wood slats.

LEED: Urban Evolutions veneer panels may contribute toward satisfying the following credits under LEED® v4.1:

M&R – Material Ingredients – Declare

M&R – Sourcing of Raw Materials – Material Reuse (Urban Wood), Wood Products (FSC)

IEQ – Low-Emitting Materials – VOC Emissions Evaluation

Human Health: Certified Clean Air GOLD (CDPH Compliant), Declare Red List Free

End of Life: Panels can be reused in their entirety. Learn more through our [UE Takeback Reuse Program](#).

For further information, please reach out to the following team members:


- Sustainability Inquiries - Emma@urbanevolutions.com
- Specification & Product Inquiries - Matt@urbanevolutions.com



ARUNDI DECORATIVE WOOD WALL PANELS

PRODUCT IMAGES


Panel Details

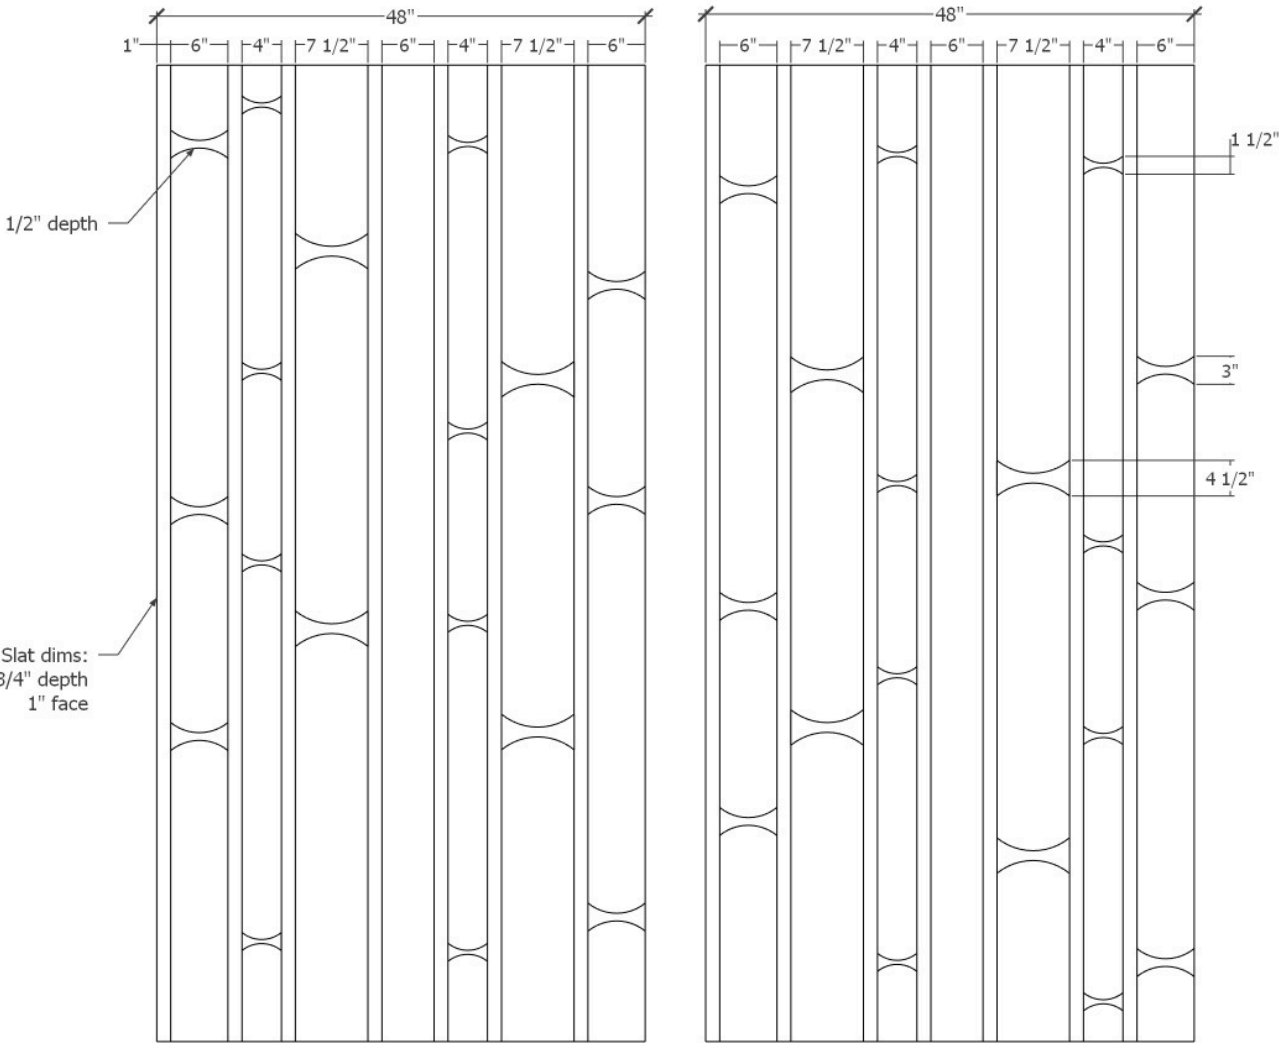

ARUNDI DECORATIVE WOOD WALL PANELS

PRODUCT IMAGES

Slat Dimensions

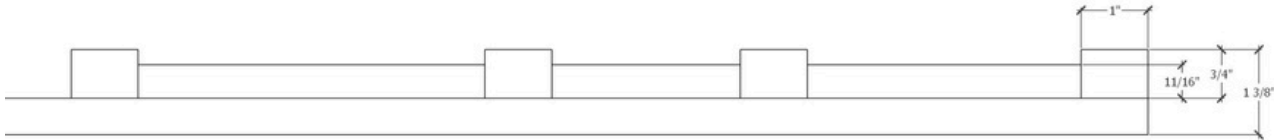

Edge Detail

