


CURVED CLASSIC SLAT WOOD WALL PANELS

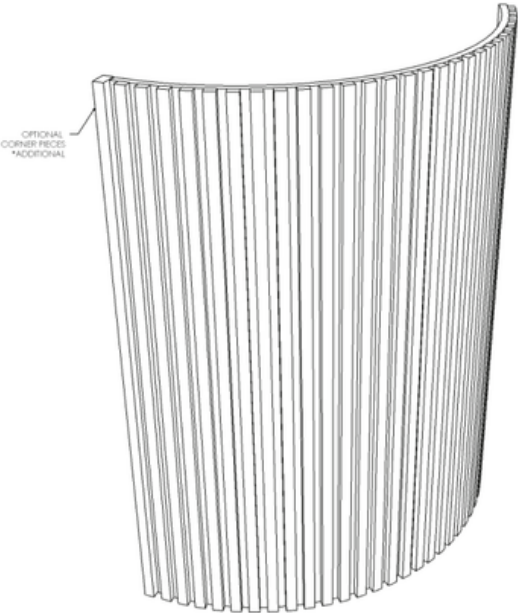

PRODUCT SPECIFICATIONS

SLAT DIMENSIONS	Overall standard thickness is 1 3/8" Panels include a 3/4" thick nominal veneered backer (11/16" actual) Standard individual slat size is 1" face, 11/16" visible depth (3/4" depth, routed 1/16" into backer)
PANEL WIDTH	Panel supplied up to 4' maximum Can be butted together seamlessly
PANEL HEIGHT	100sf for 2' and/or 4' x 8' panels 200 sf for custom size panels
MINIMUM	100sf for 2' X 8' panels 200sf for custom size panels
FINISH	Unfinished or prefinished - see next page
INSTALLATION	Direct through the face or from the back side if accessible. Optional: Shipped with a few loose slats. Install through routing pattern then re-attach slats in the field to cover screw heads - see drawing below (only done upon request)
CUSTOM	Custom slat and panel sizes available

NOTE: Pricing of all solid wood and veneer products experience fluctuations. Please reach out for current pricing for your specific project

CURVED CLASSIC SLAT WOOD WALL PANELS

PRODUCT DATA

Description: Three-dimensional wall panels with solid wood slats on MDF.

Species Options: Select White Oak, Select Walnut, Select Ash, Select Paint Grade Poplar

Source Options: Domestic Timber (Midwest)

Dimensions: 4'x8' panels standard

Minimum Radius: 16"

Weight: 4.5-4.75lbs per SF

Core: 11/16" MDF, NAF, TSCA Title VI Compliant, Class A Fire Rated and/or FSC Certified Core available on request (FSC-C199866)

Finish Options: Matte Clear, Premium Oil, Smoke, Custom Stain

Additional Options: Trim and corner pieces available for an additional charge. Unfinished slatted wall panels are available upon request

Site Conditions: For most installations, we recommend a climatic temperature between 55 to 75 degrees Fahrenheit and 30% to 50% humidity level. Environments that do not meet these criteria will cause wood to experience shrinking and swelling issues that damage the product. We cannot guarantee our product's performance in such environments.

Installation: Materials are not included and must be purchased separately. For wall installation, we recommend a direct attachment through the face of the panel and plugging visible screw heads. Optional install: Shipped with a few loose slats. Install through routing pattern then re-attach slats in the field to cover screw heads - see drawing below (only done upon request).

Grain and Allowances: Natural color variation will occur across panels. White Oak and Walnut panels may include sapwood up to 10% of total panel. Small, sound pin knots may occur in solid wood slats.

LEED: Urban Evolutions veneer panels may contribute toward satisfying the following credits under LEED® v4.1:

M&R – Material Ingredients - Declare
IEQ – Low-Emitting Materials – VOC Emissions Evaluation

Human Health: Certified Clean Air GOLD (CDPH Compliant), Declare Red List Free

End of Life: Panels can be reused in their entirety. Learn more through our [UE Takeback Reuse Program](#)


For further information, please reach out to the following team members:

- Sustainability Inquiries - Emma@urbanevolutions.com
- Specification & Product Inquiries - Matt@urbanevolutions.com

CURVED CLASSIC SLAT WOOD WALL PANELS

PRODUCT IMAGES

Slat Dimensions

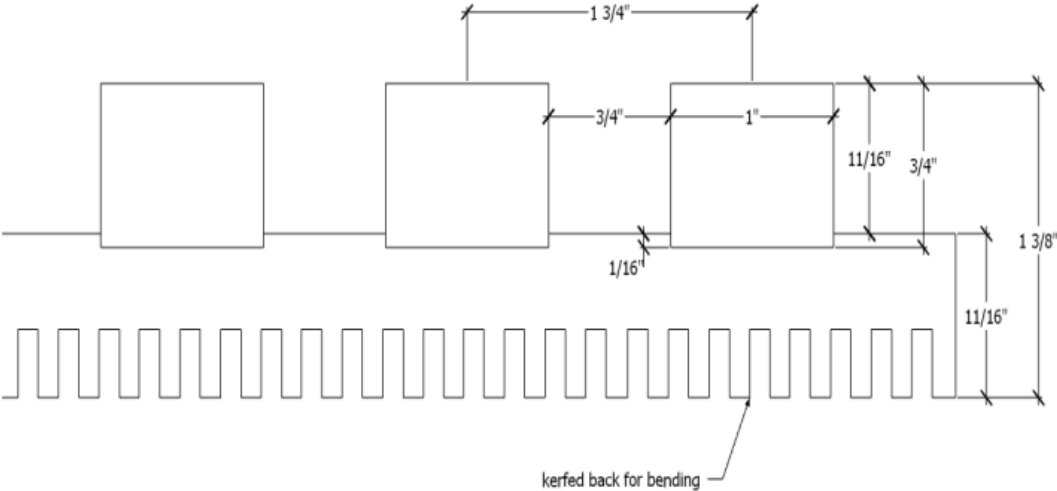

Optional Install, Top View

