

PRODUCT SPECIFICATIONS

SLAT DIMENSIONS	Overall standard thickness is 1 3/8" Panels include a 3/4" thick nominal veneered backer (11/16" actual) Standard individual slat size is 1" face, 11/16" visible depth (3/4" depth, routed 1/16" into backer) *see drawing on page 3 for medallion dimensions
PANEL WIDTH	Panel supplied up to 4' maximum Trim overlaps to hide vertical seams
PANEL HEIGHT	Standard height is 8' Up to 10' available (price increase)
MINIMUM	96sf
FINISH	Unfinished or Prefinished
INSTALLATION	See page 4 for installation information.

NOTE: Pricing of all solid wood and veneer products experience fluctuations. Please reach out for current pricing for your specific project

PRODUCT DATA

Description: Three-dimensional wall panels with solid wood slats and veneer backer on MDF

Species Options: Select White Oak, Select Walnut

Source Options: Domestic Timber (Midwest), FSC® Certified Available on

Request (FSC-C199866)

Dimensions: 4'x8' panels standard

Weight: 2-3lbs per SF

Core: 11/16" MDF, NAF, TSCA Title VI Compliant, Class A Fire Rated and/or FSC Certified Core available

on request (FSC-C199866

Finish Options: Matte Clear, Premium Oil

Additional Options: Trim and corner pieces available as well as baseboard for an additional charge. Unfinished wall panels are available upon request.

Site Conditions: For most installations, we recommend a climatic temperature between 55 to 75 degrees Fahrenheit and 30% to 50% humidity level. Environments that do not meet these criteria will cause wood to experience shrinking and swelling issues that damage the product. We cannot guarantee our product's performance in such environments.

Installation: Installation materials are not included and must be purchased separately. We recommend screwing the panel directly to study through the routing pattern before attaching the medallions and slats. Medallions and slats can be face nailed to the panels. Adhesive is optional. Please reference drawing on page 4

Grain and Allowances: Natural color and grain variation occur across panels. White Oak and Walnut panels may include sapwood up to 10% of total panel. Small, sound pin knots may occur in solid wood slats.

LEED: Urban Evolutions veneer panels may contribute toward satisfying the following credits under LEED® v4.1:

M&R - Material Ingredients - Declare

M&R - Sourcing of Raw Materials - Material Reuse (Urban Wood), Wood Products (FSC)

IEQ – Low-Emitting Materials – VOC Emissions Evaluation

Human Health: Certified Clean Air GOLD (CDPH Compliant), Declare Red List Free

End of Life: Panels can be reused in their entirety. Learn more through our <u>UE Takeback Reuse Program</u>


For further information, please reach out to the following team members:

- Sustainability Inquiries Emma@urbanevolutions.com
- Specification & Product Inquiries Matt@urbanevolutions.com




PRODUCT IMAGES

Medallion Dimensions

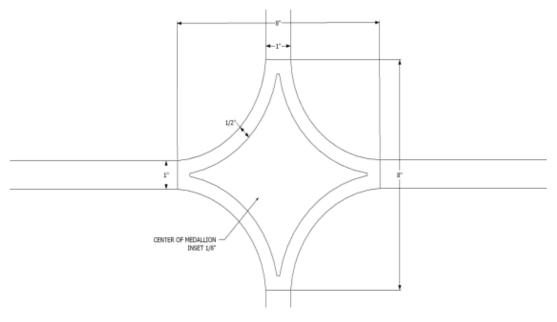


Panel Details

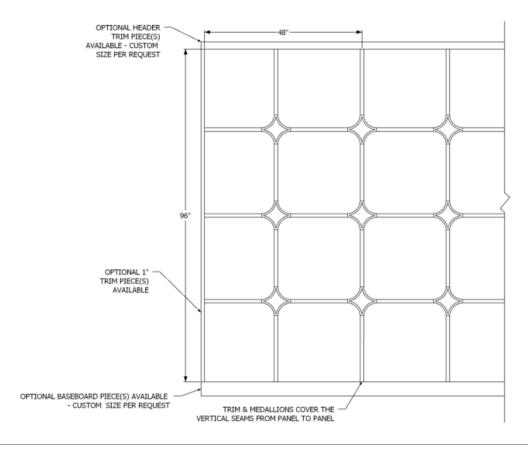

RECOMMENDED INSTALLATION

Installation materials are not included and must be purchased separately. We recommend screwing the panel directly to studs through the routing pattern before attaching the medallions and slats. Medallions and slats can be face nailed to the panels.

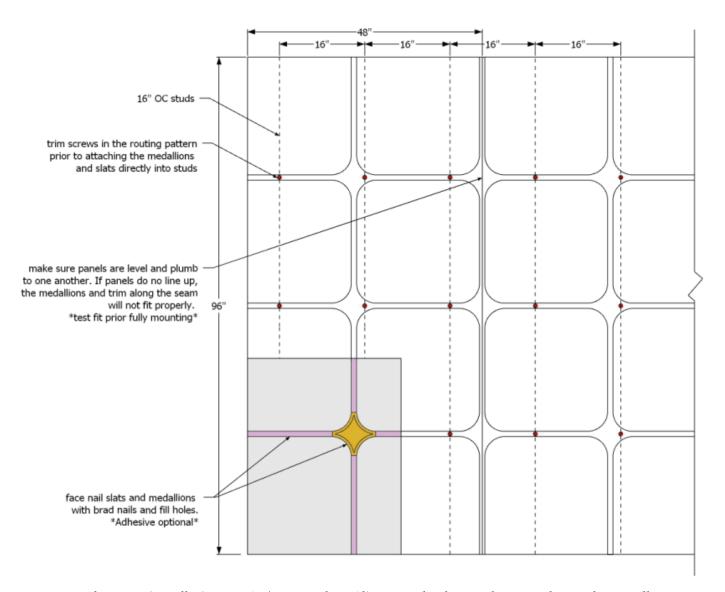

Alternate installation: MF375 Monarch Z-Clips can also be used to attach panels to wall. Slats and medallions will still need to be face nailed to the panels

Note: Slats and medallions are pre-fabricated and disassembled. For easy installation, slats and medallions are numbered accordingly

