

PRODUCT SPECIFICATIONS

| SLAT DIMENSIONS | Overall standard thickness is 11/2" Panels include 3/4" thick non-veneer backer (11/16" actual) Standard individual slat size is 11/2" face, 3/4" visible depth |
|-----------------|---|
| PANEL WIDTH | Panel supplied up to 2' maximum Can be butted together seamlessly |
| PANEL HEIGHT | Standard height is 8' Up to 10' available (price increase) |
| MINIMUM | 100sf for 2' x 8' panels 200sf for custom size panel |
| FINISH | Unfinished or prefinished - see next page |
| INSTALLATION | Typically installed with Z clips - see next page |
| CUSTOM | Custom slat and panel sizes available |

NOTE: Pricing of all solid wood and veneer products experience fluctuations. Please reach out for current pricing for your specific project



PRODUCT DATA

Description: Three-dimensional wall panels with solid wood slats on MDF.

Species Options: Select White Oak, Select Walnut, Select Ash, Select Paint Grade Poplar

Source Options: Domestic Timber (Midwest), FSC® Certified Available on

Request (FSC-C199866)

Dimensions: 2'x8' panels standard

Weight: 4.5-4.75lbs per S

Core: 11/16" MDF, NAF, TSCA Title VI Compliant, Class A Fire Rated and/or FSC Certified Core available

on request (FSC-C199866

Finish Options: Matte Clear, Premium Oil, Smoke, Custom Stain

Additional Options: Trim and corner pieces available for an additional charge. Unfinished slatted wall panels are available upon request

Site Conditions: For most installations, we recommend a climatic temperature between 55 to 75 degrees Fahrenheit and 30% to 50% humidity level. Environments that do not meet these criteria will cause wood to experience shrinking and swelling issues that damage the product. We cannot guarantee our product's performance in such environments.

Installation: Installation materials are not included and must be purchased separately. For wall installation, we recommend using MF375 Monarch Z-Clips.

Grain and Allowances: Natural color variation will occur across panels. White Oak and Walnut panels may include sapwood up to 10% of total panel. Small, sound pin knots may occur in solid wood slats.

LEED: Urban Evolutions veneer panels may contribute toward satisfying the following credits under LEED® v4.1:

M&R - Material Ingredients - Declare

M&R - Sourcing of Raw Materials - Material Reuse (Urban Wood), Wood Products (FSC)

IEQ – Low-Emitting Materials – VOC Emissions Evaluation

Human Health: Certified Clean Air GOLD (CDPH Compliant), Declare Red List Free

End of Life: Panels can be reused in their entirety. Learn more through our <u>UE Takeback Reuse Program</u>.


For further information, please reach out to the following team members:

- Sustainability Inquiries Emma@urbanevolutions.com
- Specification & Product Inquiries Matt@urbanevolutions.com




PRODUCT IMAGES

Rib Dimensions

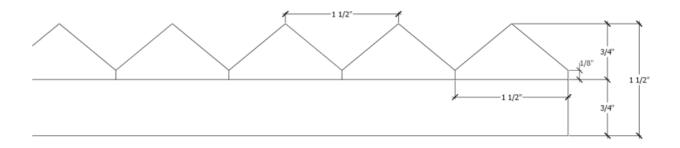


Corner Pieces Top View

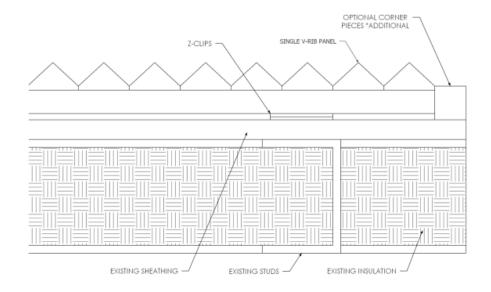

PRODUCT IMAGES

Edge Piece Top View

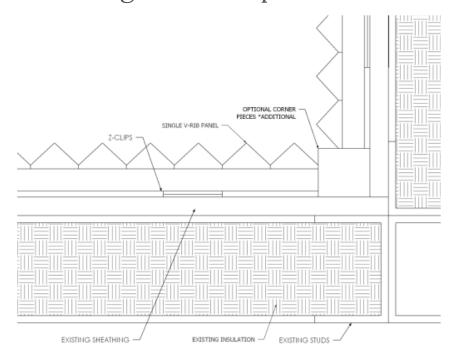

Veneer Edge Top View

