


BROAD WAVE SLAT WOOD WALL & CEILING PANELS

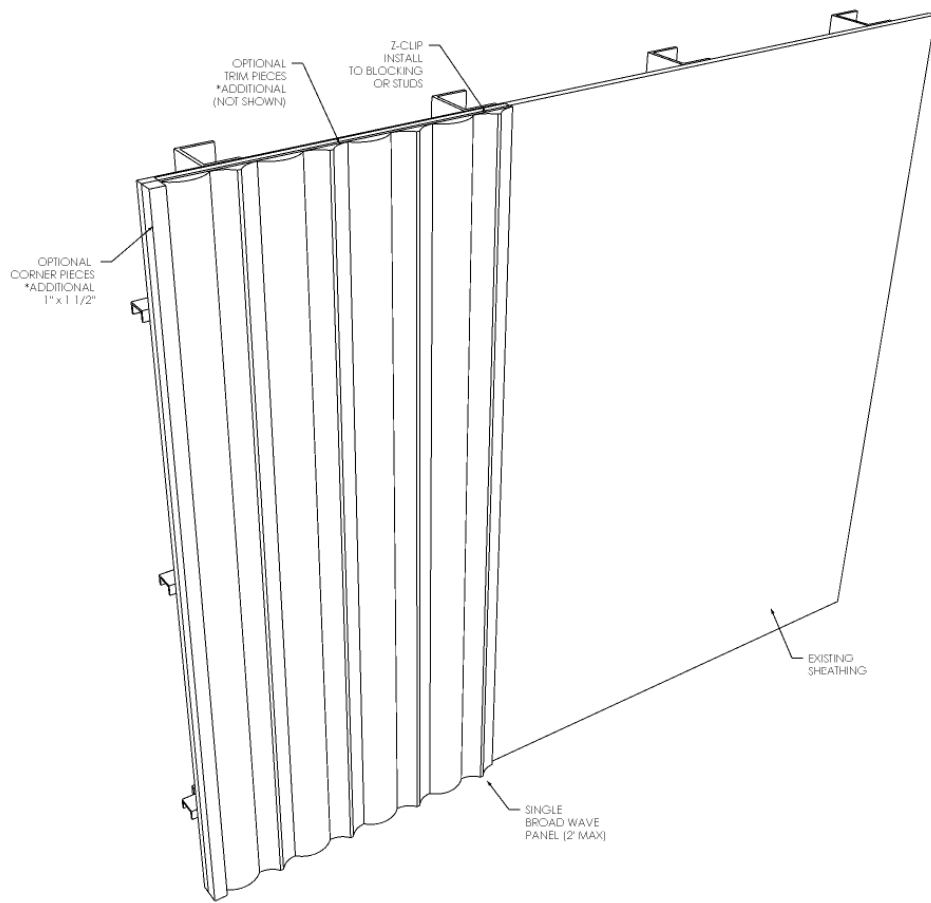

PRODUCT SPECIFICATIONS

| | |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SLAT DIMENSIONS | Overall standard thickness is 1 1/2" Panels include a 3/4" thick nominal veneered backer (11/16" actual) Standard individual slat size is 3" face, 3/4" visible depth |
| PANEL WIDTH | Panel supplied up to 2' maximum. Can be butted together seamlessly. |
| PANEL HEIGHT | Standard height is 8' Up to 10' available (price increase) |
| MINIMUM | 100sf for 2' panels 200sf for custom size panels |
| FINISH | Unfinished or prefinished <i>see next page</i> |
| INSTALLATION | Typically installed with Z clips <i>see next page</i> |
| CUSTOM | Custom slat and panel sizes available |

NOTE: Pricing of all solid wood and veneer products experience fluctuations. Please reach out for current pricing for your specific project.

BROAD WAVE SLAT WOOD WALL & CEILING PANELS

PRODUCT DATA

Description: Three-dimensional wall and ceiling panels with solid wood slats and veneer backer on MDF.

Species Options: Select White Oak, Select Walnut, Select Ash, Select Douglas Fir, Select Paint Grade Poplar

Source Options: Domestic Timber, Felled City Trees (Urban Wood)

Dimensions: 4'x8' panels (standard)

Weight: 4.5-4.75lbs per SF

Core: 11/16" MDF, NAF, TSCA Title VI Compliant, Class A Fire Rated and/or FSC Certified Core available on request

Finish Options: All standard finishes are Class A Fire Rated. [Click here](#) for more information.

Additional Options: Trim and corner pieces available for an additional charge. Unfinished slatted wall panels are available upon request.

Site Conditions

For most installations, we recommend a climatic temperature between 55 to 75 degrees Fahrenheit and 30% to 50% humidity level. Environments that do not meet these criteria will cause wood to experience shrinking and swelling issues that damage the product. We cannot guarantee our product's performance in such environments.

Installation

Installation materials are not included and must be purchased separately. For wall installation, we recommend using MF375 Monarch Z-Clips. For ceiling installations, we recommend using MFCEIL-H Monarch Ceiling Clips. Please reach out to the hardware manufacturer for specific project considerations.


Grain and Allowances

Natural color and grain variation occur across panels. White Oak and Walnut panels may include sapwood up to 10% of total panel. Small, sound pin knots may occur in solid wood slats.


BROAD WAVE SLAT WOOD WALL & CEILING PANELS

PRODUCT IMAGES

Slat Dimensions

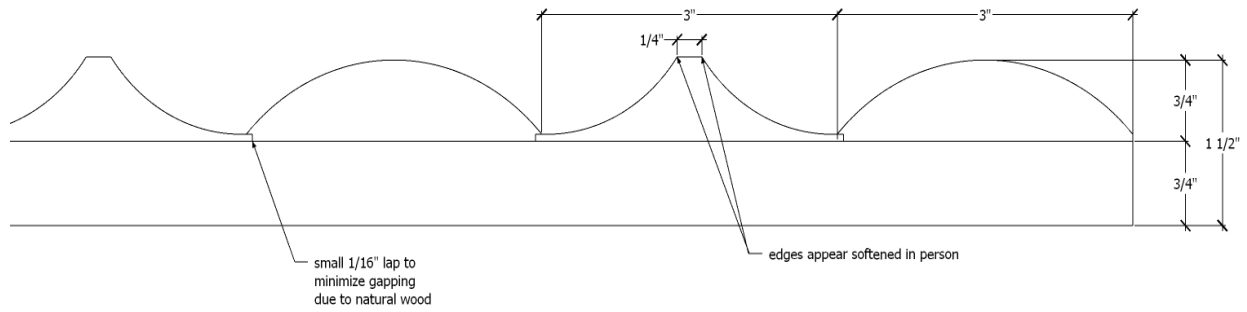


Corner Pieces Top View

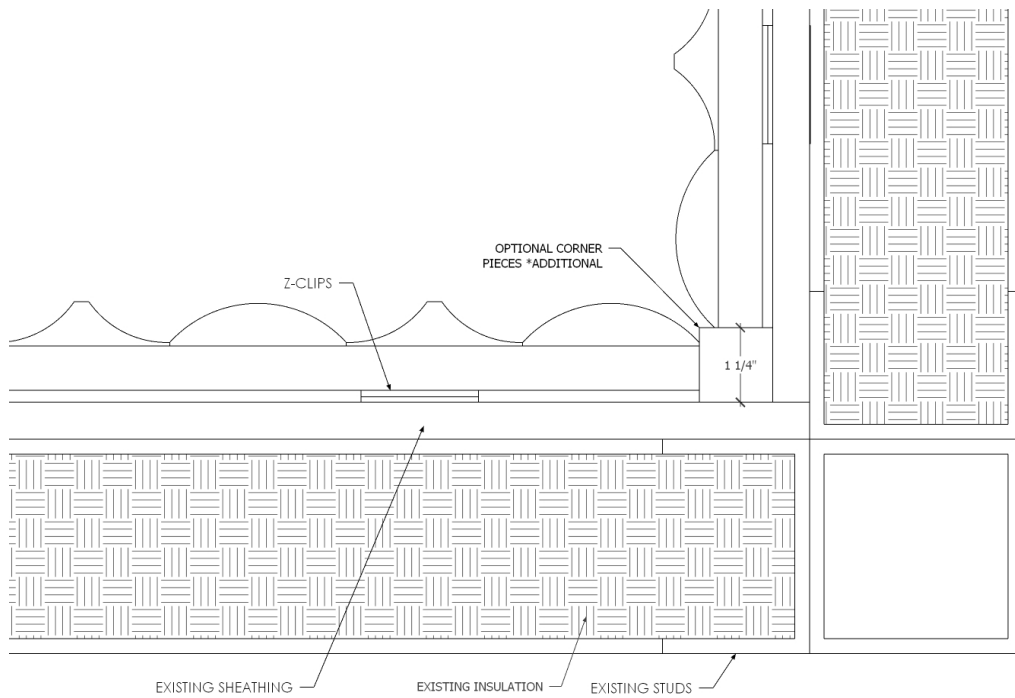

BROAD WAVE SLAT WOOD WALL & CEILING PANELS

PRODUCT IMAGES

Edge Piece Top View

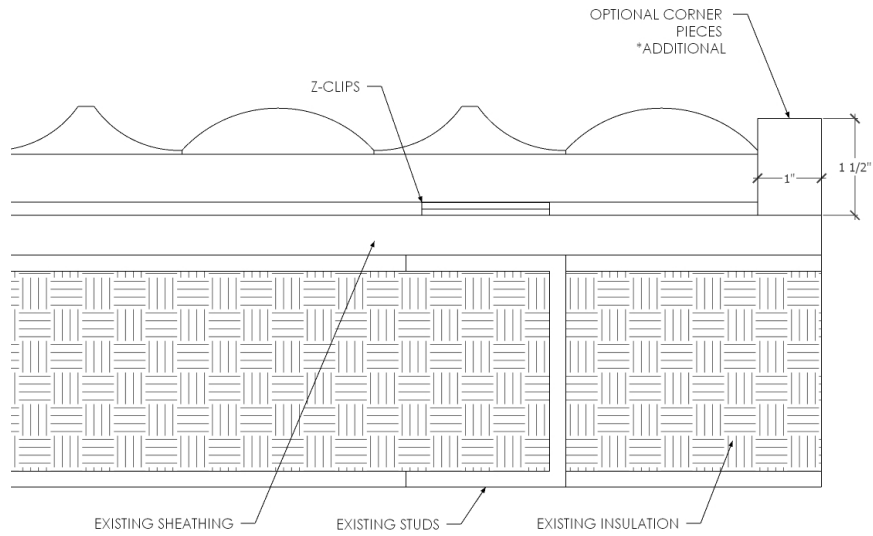

Veneer Edge Top View

