


PASS-THROUGH WOOD WALLS

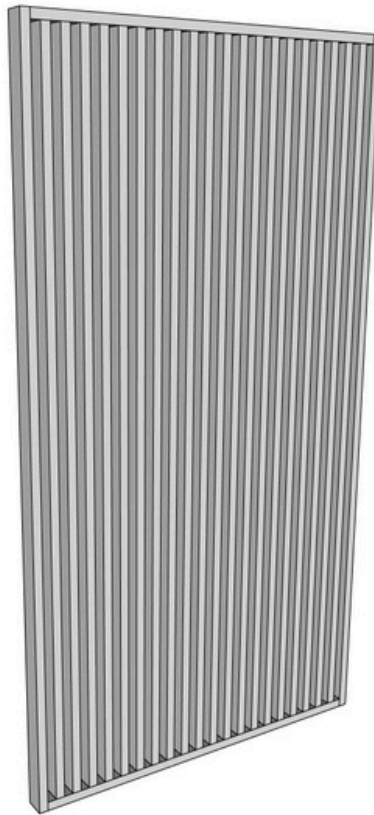

PRODUCT SPECIFICATIONS

SLAT DIMENSIONS	Standard individual slat size is 1 ½" x 3 ½" with 1 ½" spacing between slats
PANEL HEIGHT	Standard Height is 8' Up to 10' available (price increase)
MINIMUM	32sf 200sf for custom sizes
FINISH	Unfinished or Prefinished see <i>next page</i>
INSTALLATION	See below for details
CUSTOM	Custom slat sizes available

NOTE: Pricing of all solid wood and veneer products experience fluctuations. Please reach out for current pricing for your specific project.

PASS-THROUGH WOOD WALLS

PRODUCT DATA

Description: Three-dimensional wall with veneer slats.

Species Options: Select White Oak, Select Walnut, Select Ash, Paint Grade MDF

Source Options: Domestic Timber, FSC® Certified Available on Request (FSC-C199866)

Core: 11/16" MDF, NAF, TSCA Title VI Compliant, Class A Fire Rated and/or FSC Certified Core available on request (FSC-C199866)

Finish Options: All standard finishes are Class A Fire Rated

Additional Options: Unfinished walls are available on request.

Site Conditions: For most installations, we recommend a climatic temperature between 55 and 75 degrees Fahrenheit and 30% to 50% humidity level. Environments that do not meet these criteria will cause wood to experience shrinking and swelling issues that damage the product. We cannot guarantee our product's performance in such environments.

Installation: All center vertical slats will be located with dowels and screws from the top and bottom of each wall section.

The top and bottom horizontal chords attach to the vertical side pieces via dowels, biscuits, and/or pocket screws.

All Pass-Through Wood Wall panels that are small enough (4'x10' max) can be preassembled in the factory and can be shipped whole.

Grain and Allowances: Natural color and grain variation may occur across slats. White Oak and Walnut may include sapwood up to 10% of a 4' x 8' wall. Small, sound pin knots may occur in slats.

LEED: Urban Evolutions Pass Through Slat Walls may contribute toward satisfying the following credits under LEED® v4.1:

M&R – Material Ingredient Reporting – Declare Label – Red List Free

M&R – Sourcing of Raw Materials – Wood Products (FSC Certified – FSC-C199866)


IEQ – Low-Emitting Materials – Formaldehyde Emissions Evaluation (MDF)

Please reach out to Emma Kiel at emma@urbanevolutions.com for sustainability inquiries and Matt Rasmussen at matt@urbanevolutions.com for technical specifications.

PASS-THROUGH WOOD WALLS

PRODUCT IMAGES

Elevation

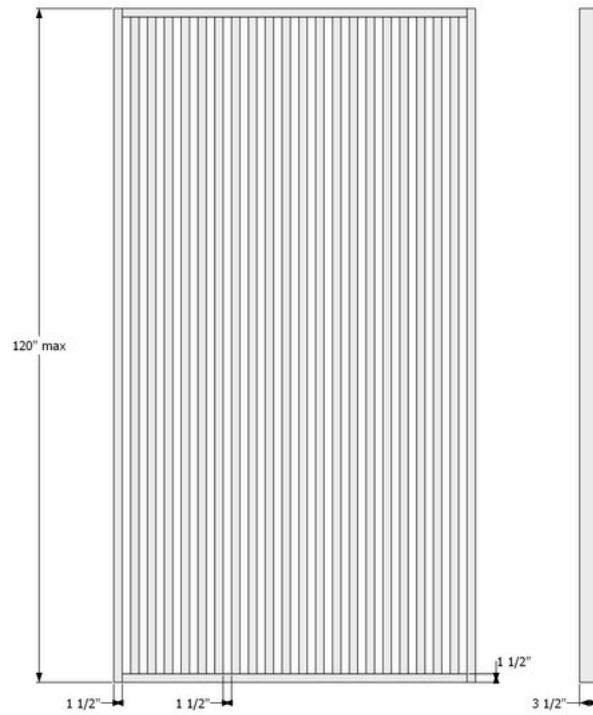

Install

