


# CURVED CLASSIC SLAT WOOD WALL PANELS

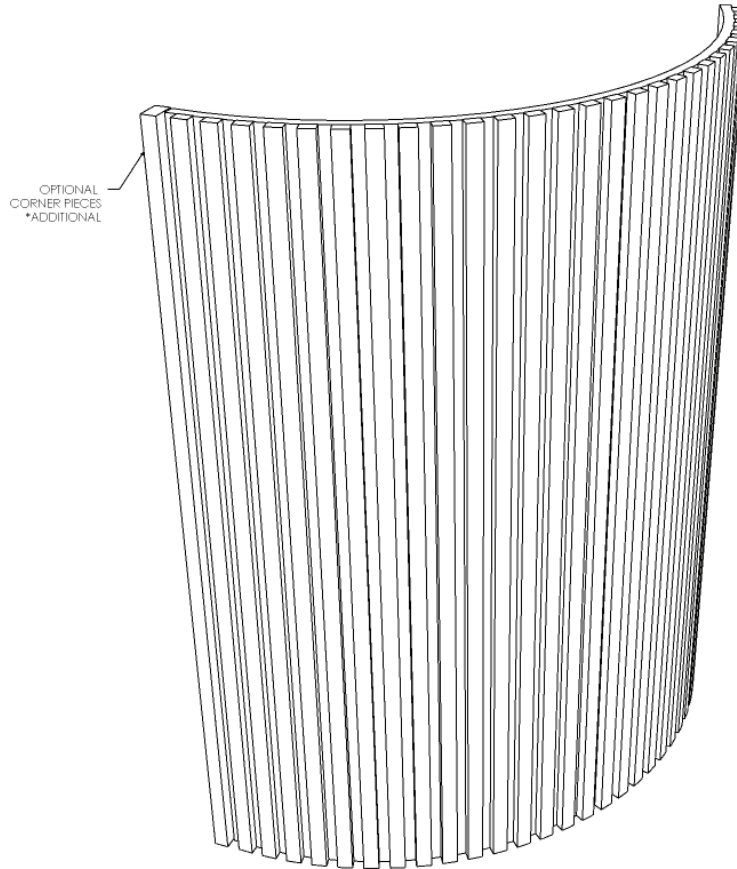

## PRODUCT SPECIFICATIONS

SLAT DIMENSIONS	Overall standard thickness is 1 3/8" Panels include a 3/4" thick nominal veneered backer (11/16" actual) Standard individual slat size is 1" face, 11/16" visible depth (3/4" depth, routed 1/16" into backer)
PANEL WIDTH	Panel supplied up to 4' maximum Can be butted together seamlessly
PANEL HEIGHT	Standard height is 8' Up to 10' available (price increase)
MINIMUM	100sf for 2' and/or 4' x 8' panels 200 sf for custom size panels
FINISH	Unfinished or prefinished <i>see next page</i>
INSTALLATION	Shipped with a few loose slats. Install through face of panel, attach slats in the field to cover screw heads.
CUSTOM	Custom slat and panel sizes available

*NOTE: Pricing of all solid wood and veneer products experience fluctuations. Please reach out for current pricing for your specific project.*



# CURVED CLASSIC SLAT WOOD WALL PANELS

---

## PRODUCT DATA

**Description:** Three-dimensional wall and ceiling panels with solid wood slats and veneer backer on MDF.

**Species Options:** Select White Oak, Select Walnut, Select Ash, Select Paint Grade Poplar

**Source Options:** Sustainably Managed Midwest Forests (Select Harvest), FSC® Certified Available on Request (FSC-C199866)

**Dimensions:** 4'x8' panels standard

**Weight:** 3.75 - 4lbs per SF

**Core:** 11/16" MDF, NAF, TSCA Title VI Compliant, Class A Fire Rated and/or FSC Certified Core available on request (FSC-C199866)

**Finish Options:** All standard finishes are Class A Fire Rated.

**Additional Options:** Trim and corner pieces available for an additional charge. Unfinished slatted wall panels are available upon request.

**Site Conditions:** For most installations, we recommend a climatic temperature between 55 to 75 degrees Fahrenheit and 30% to 50% humidity level. Environments that do not meet these criteria will cause wood to experience shrinking and swelling issues that damage the product. We cannot guarantee our product's performance in such environments.

**Installation:** Materials are not included and must be purchased separately. For wall installation, we recommend using MF375 Monarch Z-Clips. For ceiling installations, we recommend using MFCEIL-H Monarch Ceiling Clips. Please reach out to the hardware manufacturer for specific project considerations.

**Grain and Allowances:** Natural color and grain variation occur across panels. White Oak and Walnut panels may include sapwood up to 10% of total panel. Small, sound pin knots may occur in solid wood slats.

**LEED:** Urban Evolutions veneer panels may contribute toward satisfying the following credits under LEED® v4.1:

M&R – Material Ingredients - Declare

M&R – Sourcing of Raw Materials – Material Reuse (Urban Wood)


IEQ – Low-Emitting Materials – Formaldehyde Emissions Evaluation (MDF)

**Sustainability:** Our wood wall panels are Living Building Challenge Red List Free, feature Greenguard Gold finish options, and use Eco-Certified MDF. Please reach out to Emma Kiel at [emma@urbanevolutions.com](mailto:emma@urbanevolutions.com) for sustainability inquiries and Matt Rasmussen at [matt@urbanevolutions.com](mailto:matt@urbanevolutions.com) for technical specifications.

# CURVED CLASSIC SLAT WOOD WALL PANELS

## PRODUCT IMAGES

### Slat Dimensions

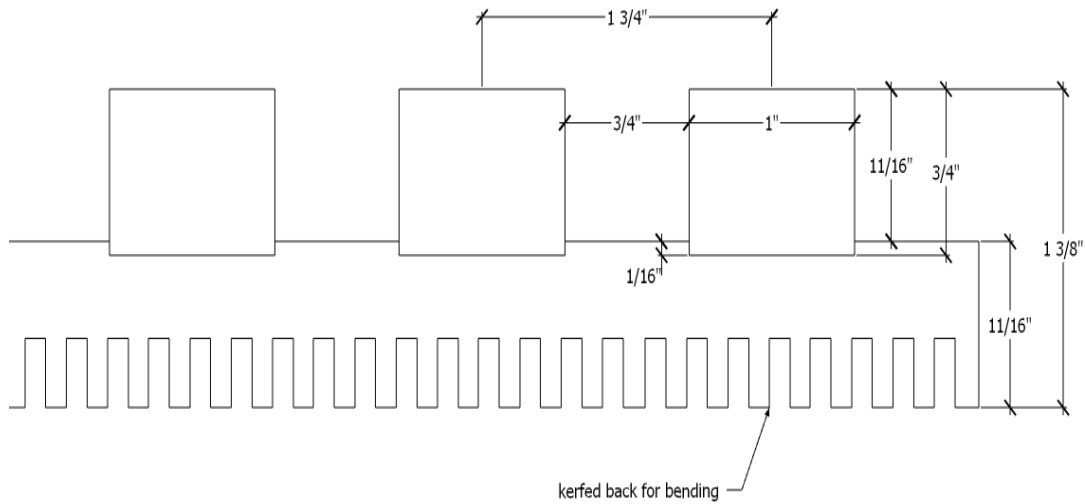

### Install, Top View

